


1W,3.3 - 100V Zener Diodes

Features

- Low leakage current
- Available in unidirectional
- Glass passivated junction
- Zener voltage tolerance is $\pm 5\%$
- Total power dissipation: Max 1W
- Moisture sensitivity: level 1, per J-STD-020
- Halogen-free according to IEC 61249-2-21 definition



SMA(DO-214AC)

Applications

Protection from high voltage, high energy transients, voltage stabilization.

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Ratings	Unit
Zener voltage	V_Z	See Next Table	V
Power dissipation at $T_L=75^\circ\text{C}$	P_{tot}	1	W
Maximum instantaneous forward voltage at 200mA	V_F	0.9	V
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$

Thermal-Mechanical Specifications ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Typ	Unit
Thermal Resistance, Junction to Ambient	R_{thJA}	90	$^\circ\text{C} / \text{W}$
Thermal Resistance, Junction to Case	R_{thJC}	20	$^\circ\text{C} / \text{W}$
Thermal Resistance, Junction to Lead	R_{thJL}	25	$^\circ\text{C} / \text{W}$

Note:

1. The thermal resistance from junction to ambient, case or lead, mounted on P.C.B with 5×5mm copper pads

Electrical Characteristics (TA = 25 °C unless otherwise noted)

Part Number	Marking	V _Z at I _{ZT} (V)			I _{ZT} (mA)	Maximum zener impedance		I _{ZK} (mA)	Maximum reverse leakage at V _R (μA)	Test voltage V _R (V)	Maximum Zener Current
		Min	Typ	Max		Z _{ZT} at I _{ZT} (Ω)	Z _{ZK} at I _{ZK} (Ω)				I _{ZM} (mA)
1SMA4728A	4728A	3.14	3.3	3.47	76	10	400	1.0	100	1.0	274
1SMA4729A	4729A	3.42	3.6	3.78	69	10	400	1.0	100	1.0	251
1SMA4730A	4730A	3.71	3.9	4.10	64	9	400	1.0	50	1.0	232
1SMA4731A	4731A	4.09	4.3	4.52	58	9	400	1.0	10	1.0	210
1SMA4732A	4732A	4.47	4.7	4.94	53	8	500	1.0	10	1.0	192
1SMA4733A	4733A	4.85	5.1	5.36	49	7	550	1.0	10	1.0	177
1SMA4734A	4734A	5.32	5.6	5.88	45	5	600	1.0	10	2	161
1SMA4735A	4735A	5.89	6.2	6.51	41	2	700	1.0	10	3	146
1SMA4736A	4736A	6.46	6.8	7.14	37	3.5	700	1.0	10	4	133
1SMA4737A	4737A	7.13	7.5	7.88	34	4	700	0.5	10	5	121
1SMA4738A	4738A	7.79	8.2	8.61	31	4.5	700	0.5	10	6	122
1SMA4739A	4739A	8.65	9.1	9.56	28	5	700	0.5	10	7	110
1SMA4740A	4740A	9.50	10	10.50	25	7	700	0.25	10	7.6	100
1SMA4741A	4741A	10.45	11	11.55	23	8	700	0.25	5	8.4	83
1SMA4742A	4742A	11.40	12	12.60	21	9	700	0.25	5	9.1	76
1SMA4743A	4743A	12.35	13	13.65	19	10	700	0.25	5	9.9	69
1SMA4744A	4744A	14.25	15	15.75	17	14	700	0.25	5	11.4	61
1SMA4745A	4745A	15.20	16	16.80	15.5	16	700	0.25	5	12.2	57
1SMA4746A	4746A	17.10	18	18.90	14	20	750	0.25	5	13.7	50
1SMA4747A	4747A	19.00	20	21.00	12.5	22	750	0.25	5	15.2	45
1SMA4748A	4748A	20.90	22	23.10	11.5	23	750	0.25	5	16.7	41
1SMA4749A	4749A	22.80	24	25.20	10.5	25	750	0.25	5	18.2	38
1SMA4750A	4750A	25.65	27	28.35	9.5	35	750	0.25	5	20.6	34
1SMA4751A	4751A	28.50	30	31.50	8.5	40	1000	0.25	5	22.8	30
1SMA4752A	4752A	31.35	33	34.65	7.5	45	1000	0.25	5	25.1	27
1SMA4753A	4753A	34.20	36	37.80	7	50	1000	0.25	5	27.4	25
1SMA4754A	4754A	37.05	39	40.95	6.5	60	1000	0.25	5	29.7	23
1SMA4755A	4755A	40.85	43	45.15	6	70	1500	0.25	5	32.7	22
1SMA4756A	4756A	44.65	47	49.35	5.5	80	1500	0.25	5	35.8	19
1SMA4757A	4757A	48.45	51	53.55	5	95	1500	0.25	5	38.8	18
1SMA4758A	4758A	53.20	56	58.80	4.5	110	2000	0.25	5	42.6	16
1SMA4759A	4759A	58.90	62	65.10	4	125	2000	0.25	5	47.1	14
1SMA4760A	4760A	64.60	68	71.40	3.7	150	2000	0.25	5	51.7	13
1SMA4761A	4761A	71.25	75	78.75	3.3	175	2000	0.25	5	56	12
1SMA4762A	4762A	77.90	82	86.10	3	200	3000	0.25	5	62.2	11
1SMA4763A	4763A	86.45	91	95.55	2.8	250	3000	0.25	5	69.2	10
1SMA4764A	4764A	95.0	100	105.0	2.5	350	3000	0.25	5	76	9

Ratings and Characteristics Curves (T_A = 25°C unless otherwise note)

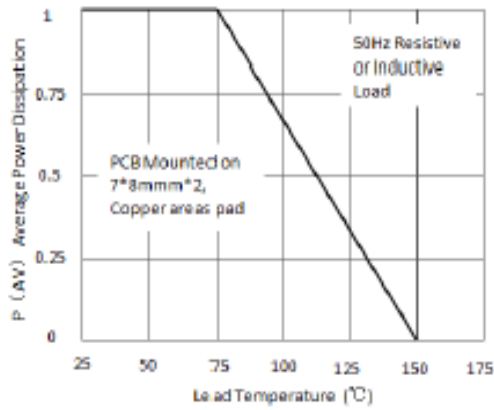


Fig.1 Maximum Continuous Power Dissipation

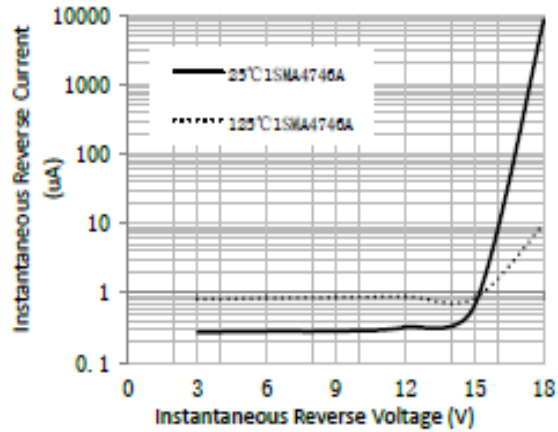


Fig.3 Typical Reverse Characteristics

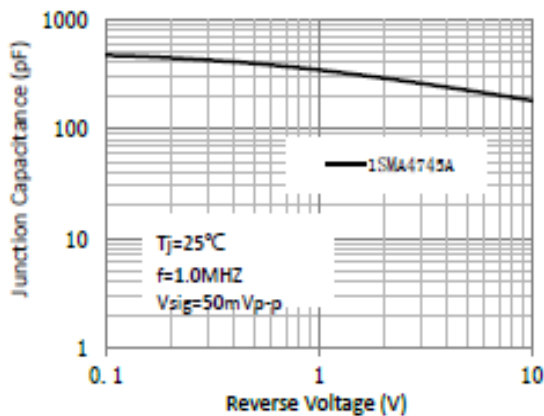


Figure 5. Typical Junction Capacitance

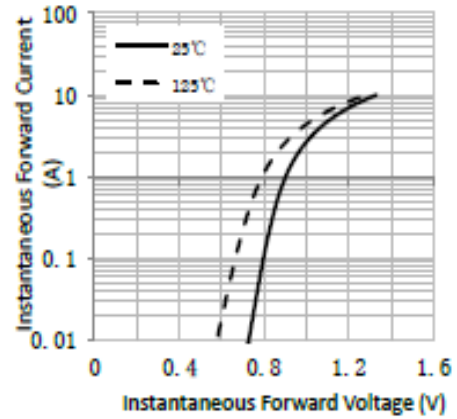


Fig.2 Typical Instantaneous Forward Characteristics

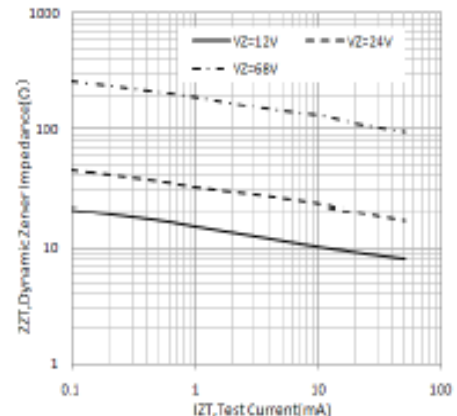


Fig.4 Typical Zener Impedance


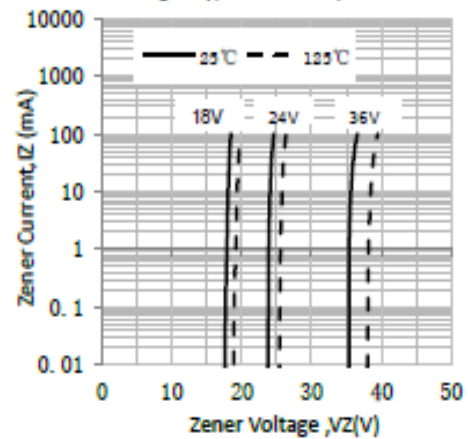


Figure 6. Typical Zener Voltage(V)

Package Outline Dimensions

in inches (millimeters)

SMA (DO-214AC)

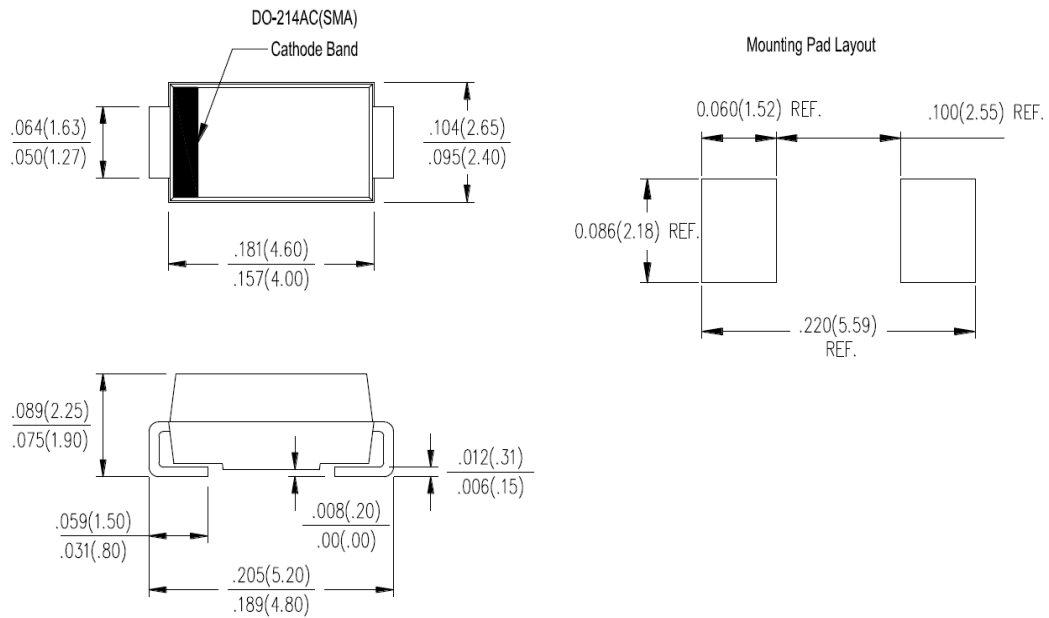

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.

(<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.