

SOD-323 Plastic-Encapsulate Schottky Barrier Diode

Features


- High Current Capability
- Low Forward Voltage Drop

Mechanical Data

- SOD-323 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any



RoHS
COMPLIANT



Marking: SOD-323

SD103AWS: S4

SD103BWS: S5

SD103CWS: S6

Maximum Ratings & Thermal Characteristics (T_A=25°C unless otherwise noted)





Parameters	Symbol	SD103AWS	SD103BWS	SD103CWS	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	40	30	20	V
Maximum RMS voltage	V _{RMS}	28	21	14	V
Maximum DC blocking voltage	V _{DC}	40	30	20	V
Non-repetitive Peak Forward Current	I _{FM}	350			mA
Peak forward surge current 8.3 ms single half sine-wave	I _{FSM}	1.5			A
Power Dissipation	P _D	200			mW
typical thermal resistance	R _{θJA}	500			°C/W
Operating junction temperature	T _J	125			°C
Storage temperature range	T _{STG}	-50-+150			°C

Electrical Characteristics (T_A=25°C unless otherwise noted)

Parameters	Symbol	Test conditions	SD103AWS	SD103BWS	SD103CWS	Unit
Maximum forward voltage	V _F	I _F = 20mA I _F = 200mA	0.370 0.600			V
Maximum reverse breakdown voltage	V _R	I _R =100uA	40	30	20	V
Maximum reverse current	I _R	V _R =30V SD103AWS V _R =20V SD103BWS V _R =10V SD103CWS	5.0			uA
Type junction capacitance	C _J	V _R =0V, f = 1MHz	50			pF
Reverse recovery time	T _{RR}	I _F =I _R =200mA, I _{rr} =0.1xI _R , R _L =100 Ω	10			ns




Ratings and Characteristics Curves

($T_A = 25^\circ\text{C}$ unless otherwise noted)

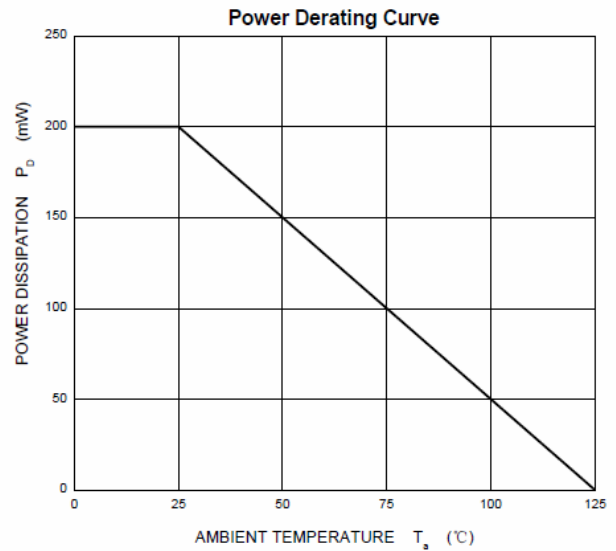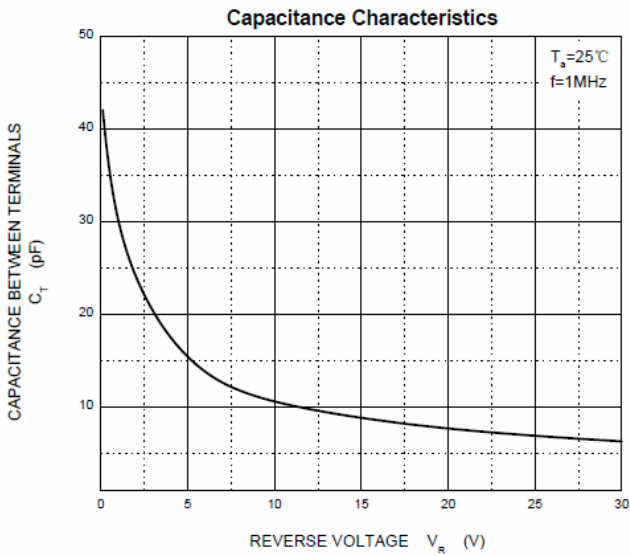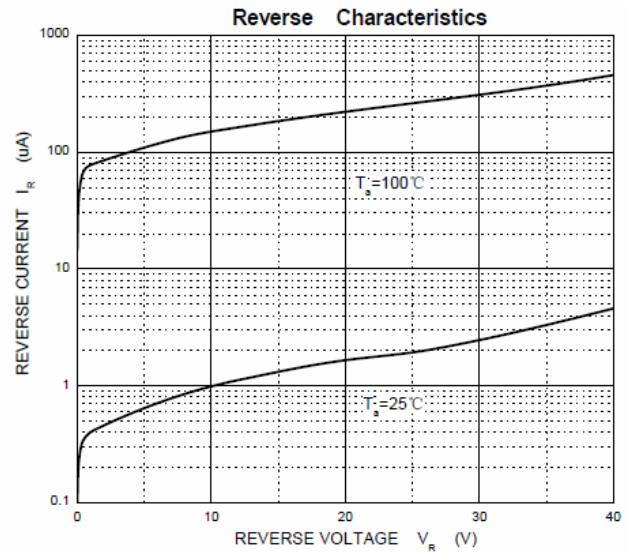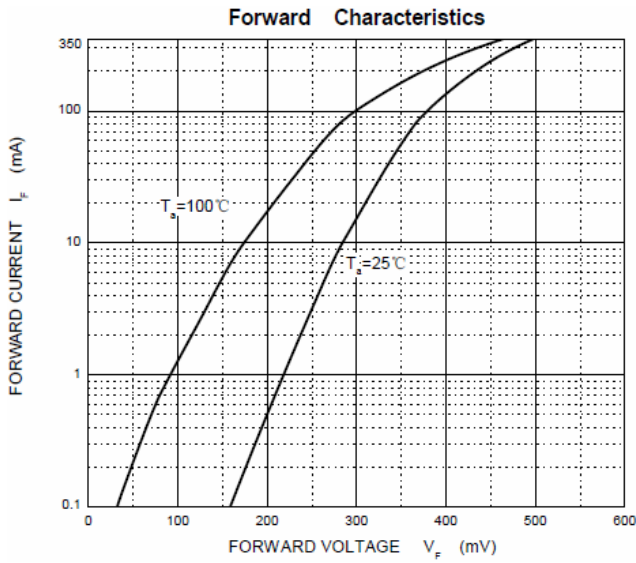

Package Outline Dimensions

millimeters



Symbol	Min	Max
A		1.000
A1	0.000	0.100
A2	0.800	0.900
b	0.250	0.350
c	0.080	0.150
D	1.200	1.400
E	1.600	1.800
E1	2.500	2.700
L	0.475REF	
L1	0.250	0.400
θ	0°	8°

Revision History

Document Version	Date of release	Description of changes
Rev.A	2015.09.01	First issue

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss arising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page. (<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.