

Ultra Low Capacitance TVS Diode Array

Features

- Low leakage current
- Low clamping voltage
- Snap-Back technology
- DFN1610-6L package
- Ultra low capacitance (0.40pF typical)
- 80Watts peak pulse power ($t_p = 8/20 \mu s$)
- ESD Protection for high-speed data lines to:
 - IEC 61000-4-4 (EFT) 40A (5/50ns)
 - IEC 61000-4-5 (Lightning) 10A (8/20 μs)
 - IEC 61000-4-2 $\pm 16KV$ contact $\pm 20KV$ air
- RoHS compliant




Marking :

DFN1610-6L

Applications

- USB 3.0, USB 2.0, MHL
- 1G/2.5G/5G/10G Ethernet
- Digital Visual Interface (DVI)
- Unified Display Interface (UDI)
- HDMI 2.0, Display Port 1.3, eSATA

Schematic Diagram

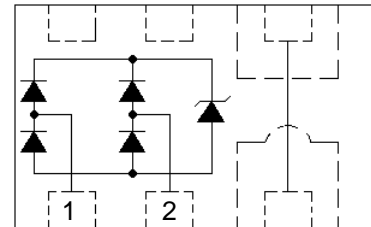

Absolute Maximum Ratings ($T_A=25^\circ C$, Unless otherwise specified.)

Parameter	Symbol	Value	Unit
Peak Pulse Power ($T_P=8/20\mu S$)	P_{PP}	80	W
Peak Pulse Current ($t_P = 8/20\mu S$)	I_{PP}	10	A
Junction Temperature	T_J	-55 to +125	$^\circ C$
Storage temperature	T_{STG}	-55 to +150	$^\circ C$

Electrical Characteristics ($T_A=25^\circ C$, Unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Typ.	Max	Unit
Reverse stand-off Voltage	V_{RWM}				3.3	V
Reverse Breakdown Voltage	V_{BR}	$I_T=10\mu A$	5	6.5	15	V
Reverse Leakage Current	I_R	$V_R=3.3V$		0.01	0.1	μA
Trigger Voltage	V_T	$I_{PP}=10A, T_P=8/20\mu S$		9.5		V
Clamping Voltage	V_C	$I_{PP}=10A, T_P=8/20\mu S$		8.0		V
Dynamic Resistance	R_{dyn}	$I_T = 0\sim 30A, t_p = TLP$		0.25		Ω
Junction Capacitance	C_J	$V_R=0V, f=1MHz, I/O$ to GND		0.4	0.50	pF

Ratings and Characteristics Curves

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Peak Pulse Power Rating Curve

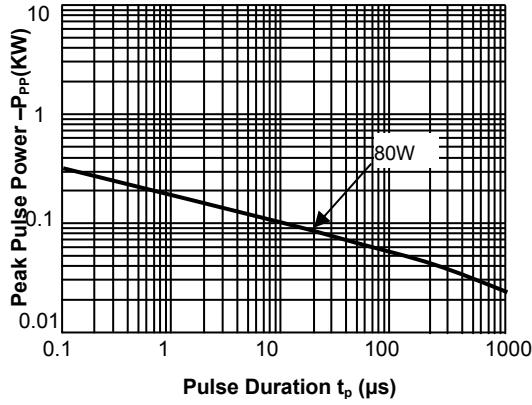


Fig.2 Pulse Derating Curve

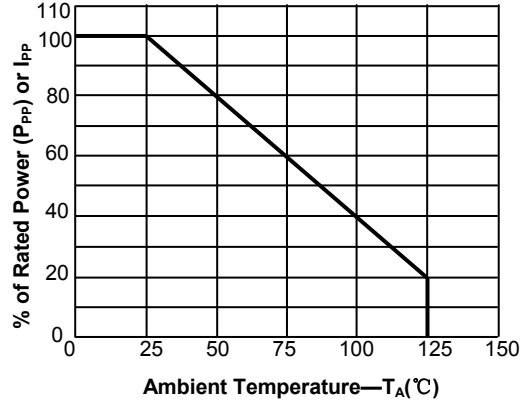


Fig.3 IEC61000-4-2 +8kV Contact Discharge

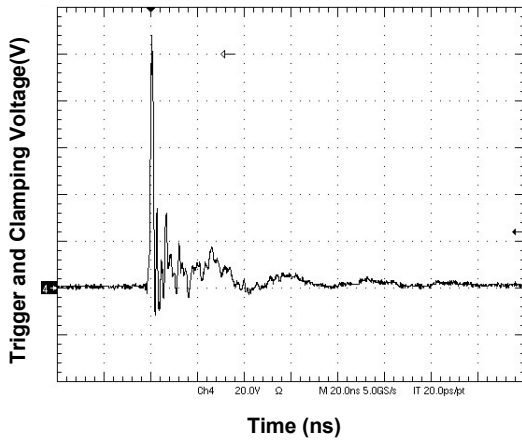


Fig.4 IEC61000-4-2 -8kV Contact Discharge

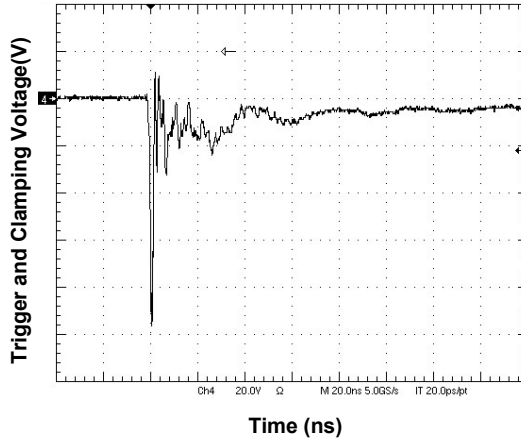


Fig.5 Transmission Line Pulse (tp=100ns)



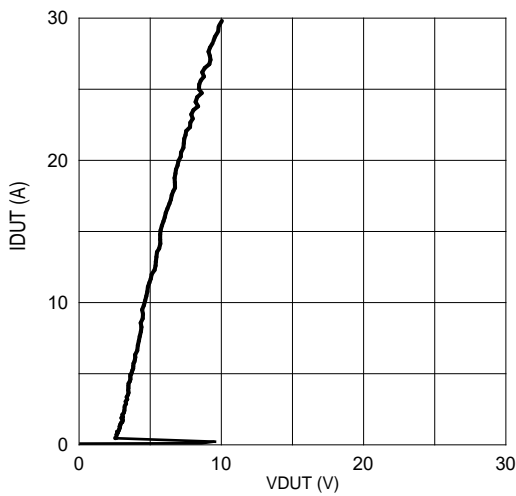


Fig.6 Transmission Line Pulse (tp=100ns)

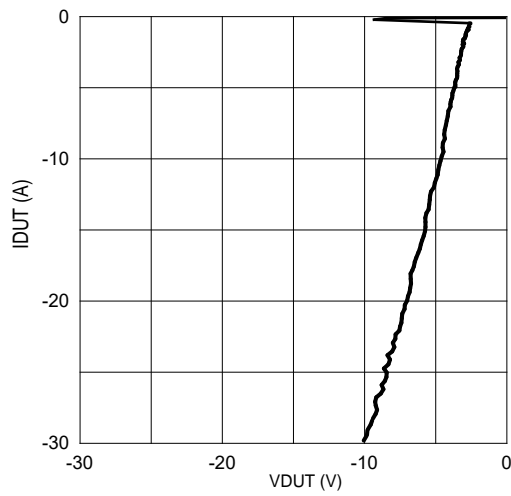

Package Outline Dimensions

in inches (millimeters)

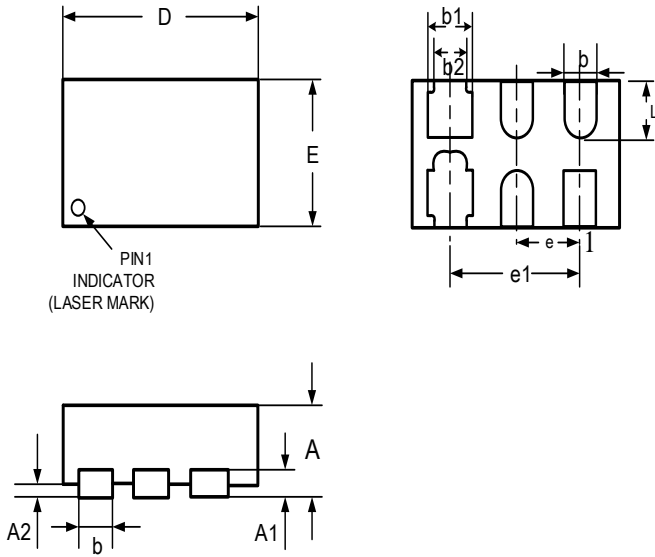

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
D	1.55	1.65	0.061	0.065
E	0.95	1.05	0.037	0.041
L	0.33	0.43	0.013	0.017
b	0.15	0.25	0.006	0.010
b1	0.35	0.45	0.014	0.018
b2	0.20	0.30	0.008	0.012
e	0.50BSC		0.020BSC	
e1	1.00BSC		0.039BSC	
A	0.40	0.50	0.016	0.020
A1	0.127REF		0.005REF	
A2	0.00	0.05	0.000	0.002

Revision History

Document Version	Date of release	Discription of changes
Rev.A	2021.03.10	Firstissue

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website homepage.

(<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.